



139SP

Solid Metal Astragal

PRODUCT CUT SHEET

Material

Steel

- ▶ Can Replace Astragal Required by the Door Manufacturer on Wood or Metal Fire-Rated Doors
- ▶ IBC, NFPA80, NFPA 252 Require the Gap at the Meeting Edge Between Fire Labeled Doors Must Not Exceed $\frac{1}{8}$ "
- ▶ Astragal Must Overlap Gap and Inactive Door Minimum of $\frac{3}{4}$ "
- ▶ Furnished with #12 x 1 $\frac{1}{4}$ " SMS

Finishes

139SP Anodized Aluminum


139SPDKB Dark Bronze

Options

- ▶ Available Lead-Lined .030" Thick Lead, Suffix "LD"
- ▶ Available with SNB, Specify



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

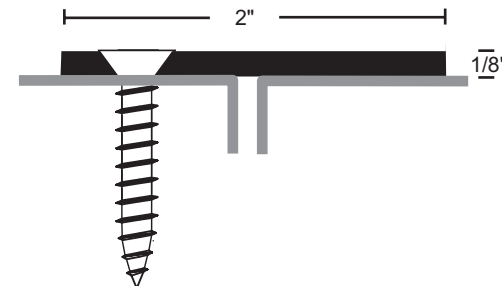



NGP-GKT-139SP-PCS-1222-B

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH

139SP/1392SP Astragal

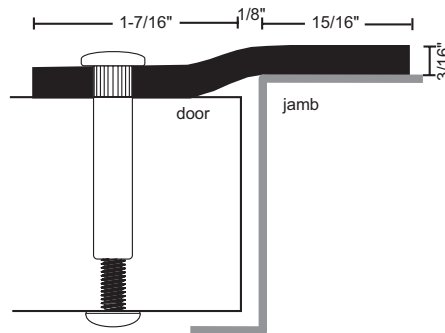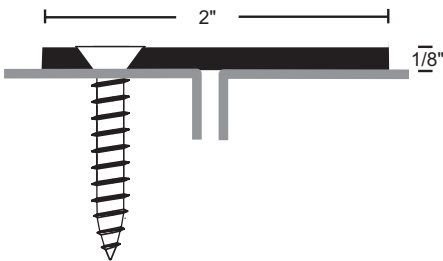

Installation Instructions

1. Cut astragal to fit.
2. Position on door face with astragal overlapping gap and other door a minimum of 3/4" (required by U.L. on fire-rated doors).
3. Mark screw holes.
4. Drill pilot holes for screws using a 11/64" drill bit (139SP) or 3/8" bit for SNB's (1392SP).
5. Install with #12x1-1/4" SMS or SNB (1392SP).
6. Adjust position so astragal does not impede proper closing and latching of door.

Instrucciones de Instalación

1. Corte el astrágalo a la medida.
2. Coloque en la cara de la puerta de manera que el astrágalo sobreponga el espacio y un mínimo de 3/4" de la otra puerta (requisito de las normas de U.L. para puertas cortafuego)
3. Marque los orificios para los tornillos.
4. Taladre los orificios guía para los tornillos con una broca de 11/64" (139SP) ó 3/8" para el SNB (1392SP).
5. Instale con #12x1-1/4" SMS o SNB (1392SP).
6. Ajuste el astrágalo de modo que no impida cerrar y correr debidamente el pasador de las puertas.



POSITIVE PRESSURE TESTED GASKETING MATERIALS
FOR FIRE DOORS
FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE
DOORS
RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS
RATED UP TO 1-1/2 HOURS.
CATEGORY J

MATERIAL DE EMPAQUE PARA PUERTAS CORTAFUEGO
SOMETIDOS A PRUEBAS DE PRESION POSITIVA
PARA USARSE EN PUERTAS METALICAS HUECAS CORTAFUEGO
CERTIFICADAS HASTA 3 HORAS Y PUERTAS DE MADERA CORTAFUEGO
CERTIFICADAS HASTA 1-1/2 HORAS
CATEGORIA J