



L-1900, FLDL

Fire-Rated Fusible Link Louver

PRODUCT CUT SHEET

For 1 3/4" Thick Doors Up To 90 Minutes



- Blades Close When Activated by Fire/Heat
- 18 Ga. Cold Rolled Steel Frame
- 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- Mitered Corners Secured with Reinforcing Clips
- Stainless Steel Spring
- 165° Fusible Link
- #8 x 3/4" Phillips Head SMS
- Free Area 40%
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options - See Color Chart on www.ngp.com
- Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
- Torx Security Screws
- Galvanneal - A40 Steel
- Type 304 Stainless Steel - Specify FLDL-SS
- Type 316 Stainless Steel - Specify FLDL-316SS



*up to
90 minutes

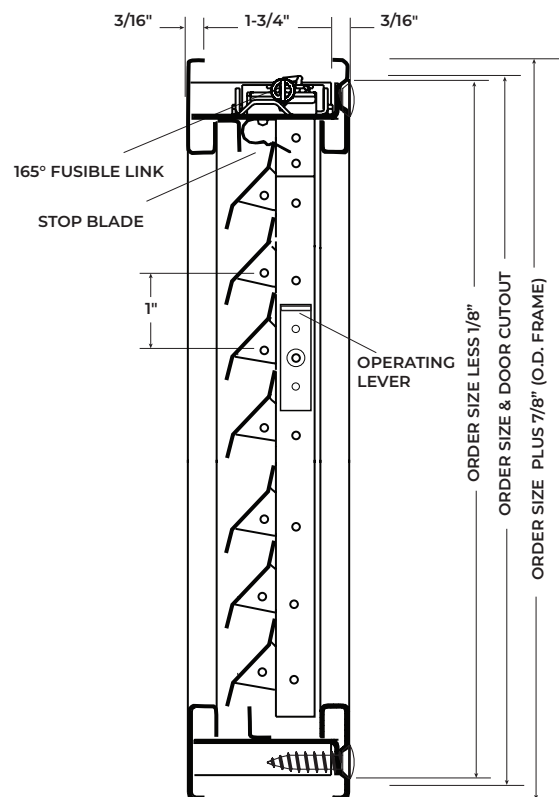

Undersized 1/8" for Clearance
Not to Scale



Size Information:
Available in Whole Inch Increments
Minimum size: 10" x 6"
Maximum size: 24" x 30"

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

NGP-LIT-L-1900-PCS-0822-A

ngp.com
1-800-NGP-RUSH



L-1900, FLDL

Fire-Rated Fusible Link Louver

Installation Instructions

Position fusible link at top.

CAUTION: NGP is not responsible for customer painted louvers, due to possible changes to the operating condition during a fire.

Instrucciones de instalación

Coloque el enlace fusible en la parte superior.

PRECAUCIÓN: NGP no es responsable por las rejillas que el cliente pinte ya que existe la posibilidad de que haya cambios en las condiciones de funcionamiento durante un incendio.



Fire Door Louver
Rejilla para Puerta Cortafuego

