



# 700N

Perimeter Seal Compatible with Parallel Arm Closers

## PRODUCT CUT SHEET

### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer Blend: Chloroprene and EPDM  
Neoprene is Black

- Very Good Abrasion Resistance, Tensile Strength and Memory
- Flame Resistant
- Moisture Resistant
- Temperature Range -20°F to 200°F
- Good Resistance to Ozone, Sunlight and Aging
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- #No Break in Seal for Closer Mounting
- Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- Head Section Not Drilled
- Jamb Sections Furnished With Slotted Holes for Adjustment
- Self Drilling #8 (Tek Type) Screws Furnished
- May Be Cut to Fit Narrow Frame Stops
- Specify "Cut to Width" on Order

### Finishes

700N Mill Aluminum  
700NA Anodized Aluminum  
700NB Gold  
700NDB Dark Bronze

### Options


FATT - Fast Attach Tape



**BHMA**  
CERTIFIED



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

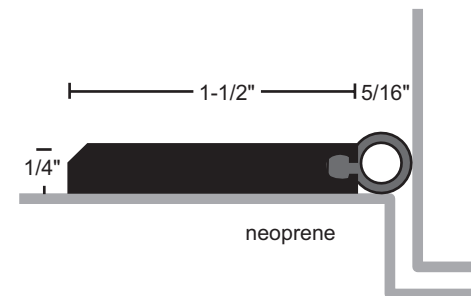

NGP-GKT-700N-PCS-1120-A



## 700, 700E 9700, 9700E Series Perimeter Seals



**WARNING:** These products can expose you to chemicals including chloroprene or DINP Diisononyl phthalate, which are known to the State of California to cause cancer and/or developmental and reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**NOTE:** Install seals before the closer. Seals installed at head will require the closer body be installed 1/4" lower on the door.

### Installation Instructions

1. Cut seal to fit.
2. Drill head piece for mounting screws, avoiding the area where the closer shoe will be located.
3. With door closed, position seal with the gasketing slightly compressed against the door.
4. Install with TEK screws provided, working from one end to the other.

700EN, 700ES, 700N, 700S, 706, 706E, 9700, 9700E, 9706E



POSITIVE PRESSURE TESTED GASKETING MATERIALS  
FOR FIRE DOORS  
FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE  
DOORS  
RATED UP TO 3 HOURS AND WOOD-TYPE FIRE  
DOORS  
RATED UP TO 1-1/2 HOURS  
CATEGORY H

Smoke and Draft Control gasketing (Category H) tested to UL 1784; meets  
requirements of NFPA 105, IBC for use on "S" label doors. APPLIES TO  
700EN, 700N, 700ES, 700S, 706, 706E, 9700, 9700E, 9706E ONLY.

700EU, 700U, 701EP, 701P, 703EV, 703V, 704EV, 704V, 705EV, 705V



POSITIVE PRESSURE TESTED GASKETING  
MATERIALS  
FOR FIRE DOORS  
FOR APPLICATION TO HOLLOW-METAL-TYPE  
FIRE DOORS  
RATED UP TO 3 HOURS AND WOOD-TYPE FIRE  
DOORS  
RATED UP TO 1-1/2 HOURS  
CATEGORY J

8.22